

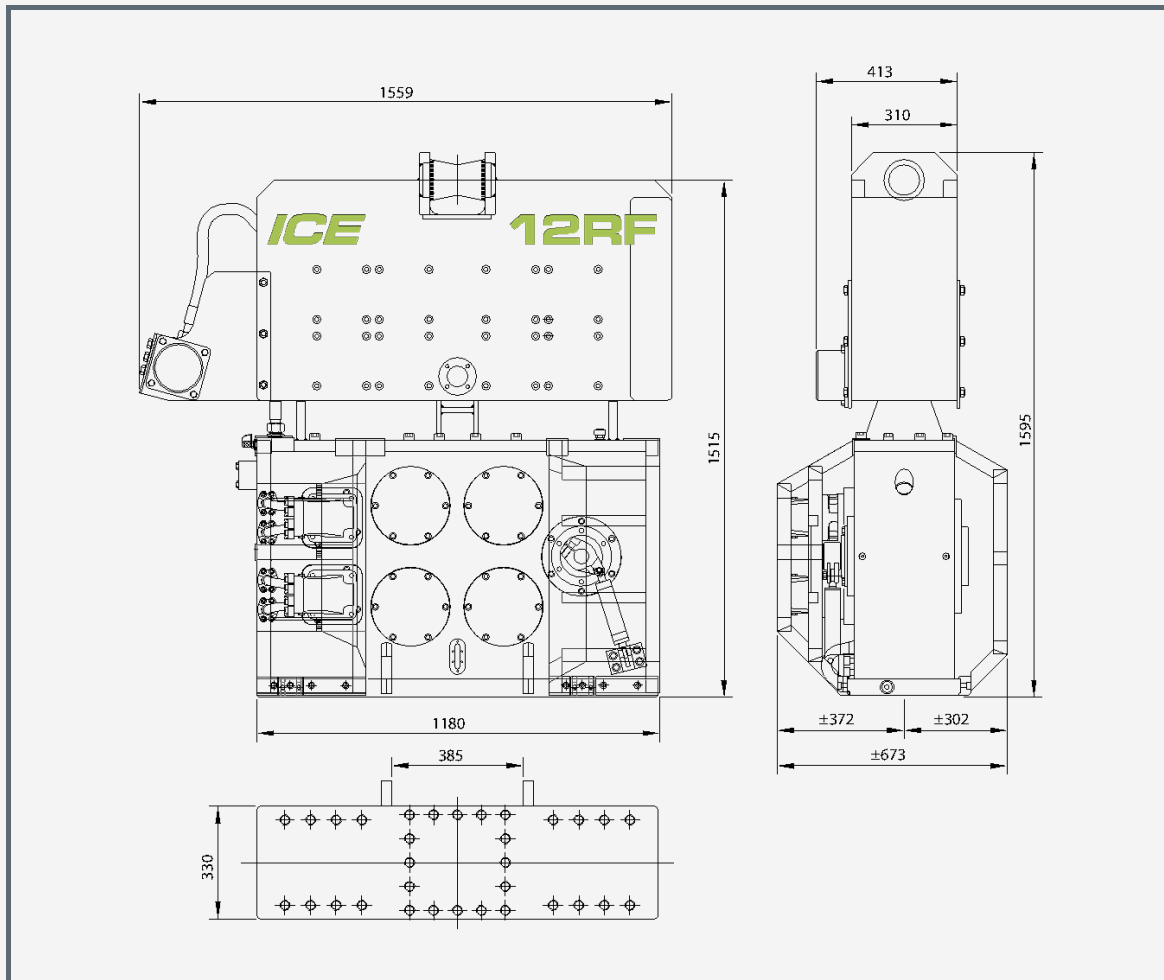
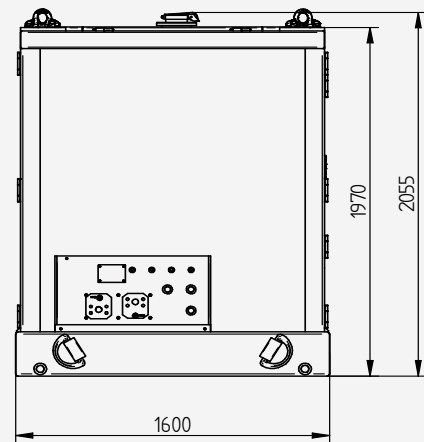


ICE 12 RF Vibratory Hammer

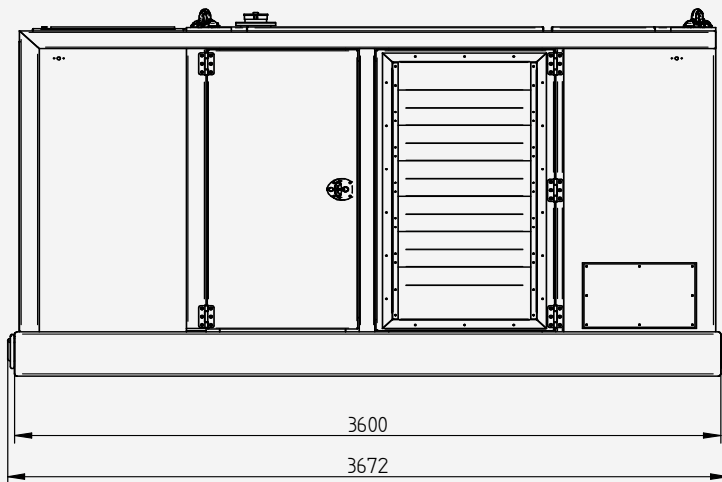

Specifications		12RF	
Eccentric moment	0-12	kgm	
Max. centrifugal force	0-700	kN	
Max. frequency	2300	rpm	
Max. amplitude excluding 100 TU	17	mm	
Max. amplitude including 100 TU	12,4	mm	
Max. static line-pull	250	kN	
Max. operating pressure	350	bar	
Max. oil flow	261	l/min	
Forced lubrication	yes		
Dynamic weight excluding 100 TU	1450	kg	
Dynamic weight including 100 TU	1940	kg	
Total weight excluding 100 TU & hoses	2390	kg	
		Clamps:	
		Sheet pile clamp	100TU
		Transport weight per piece	490 kg
		Tube clamps	55TC
		Transport weight per piece	310 kg
		Powerpack:	
		Model	300 series
		Hose set:	
		Length	30 m
		Transport weight	465 kg


ICE 300 PP Hydraulic Power Pack

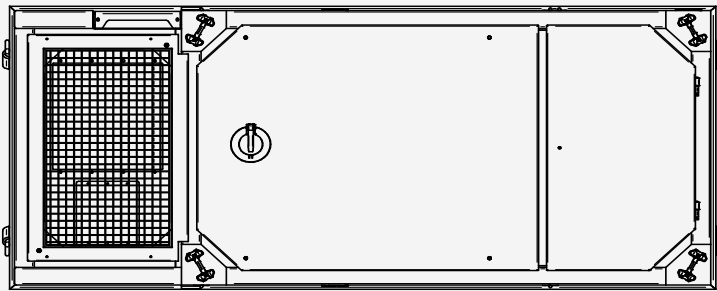

Specifications :	ICE 300 STAGE V	
Diesel Engine	Volvo TAD 882 VE	
Max. theoretical power	210/286	kW/HP
Max. frequency	2200	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	324	L/min
Diesel oil	530	L
DEF (AdBlue) capacity	25	L
Hydraulic oil	800	L
Weight without fuel	4700	kg
Weight filled up	5150	kg

ICE 100 TU Universal Clamp

M100TU0010 / 0708

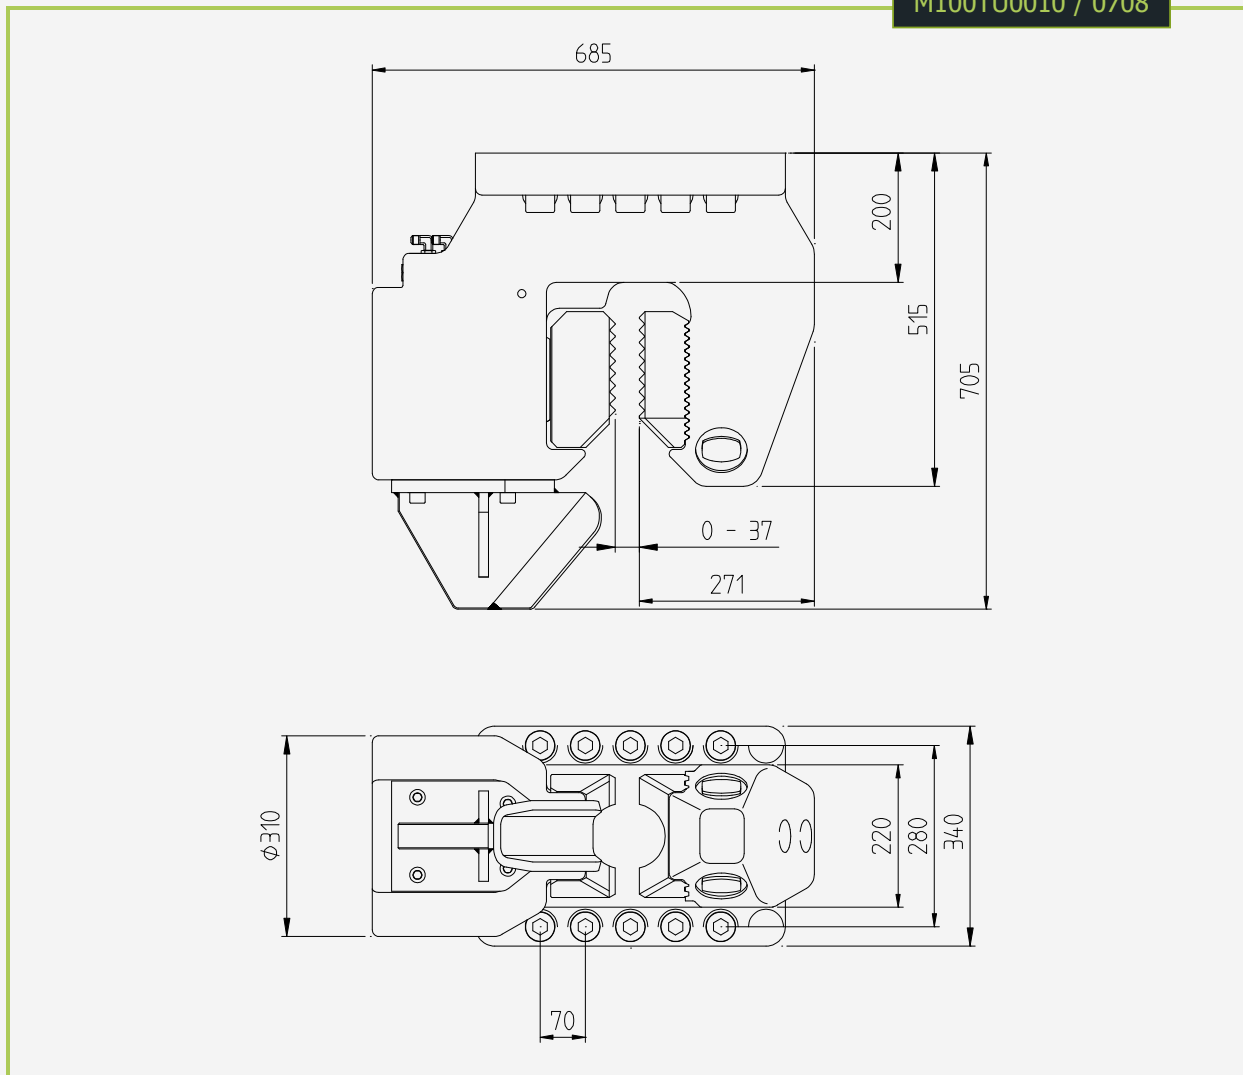

SPECIFICATIONS:		TECHNISCHE DATEN:		SPÉCIFICATIONS:		SPECIFICATIES:	
Clamp universal		Universalzange		Pince universal		Universeelklem	
Clamping force	1000 kN	Klemmkraft		Force de serrage		Klemkracht	
Max. operating pressure	320 bar	Max. Betriebsdruck		Pression de travail max.		Max. werkdruk	
Weight	490 kg	Gewicht		Poids		Gewicht	