



ICE 20 RF Vibratory Hammer

01208-120201

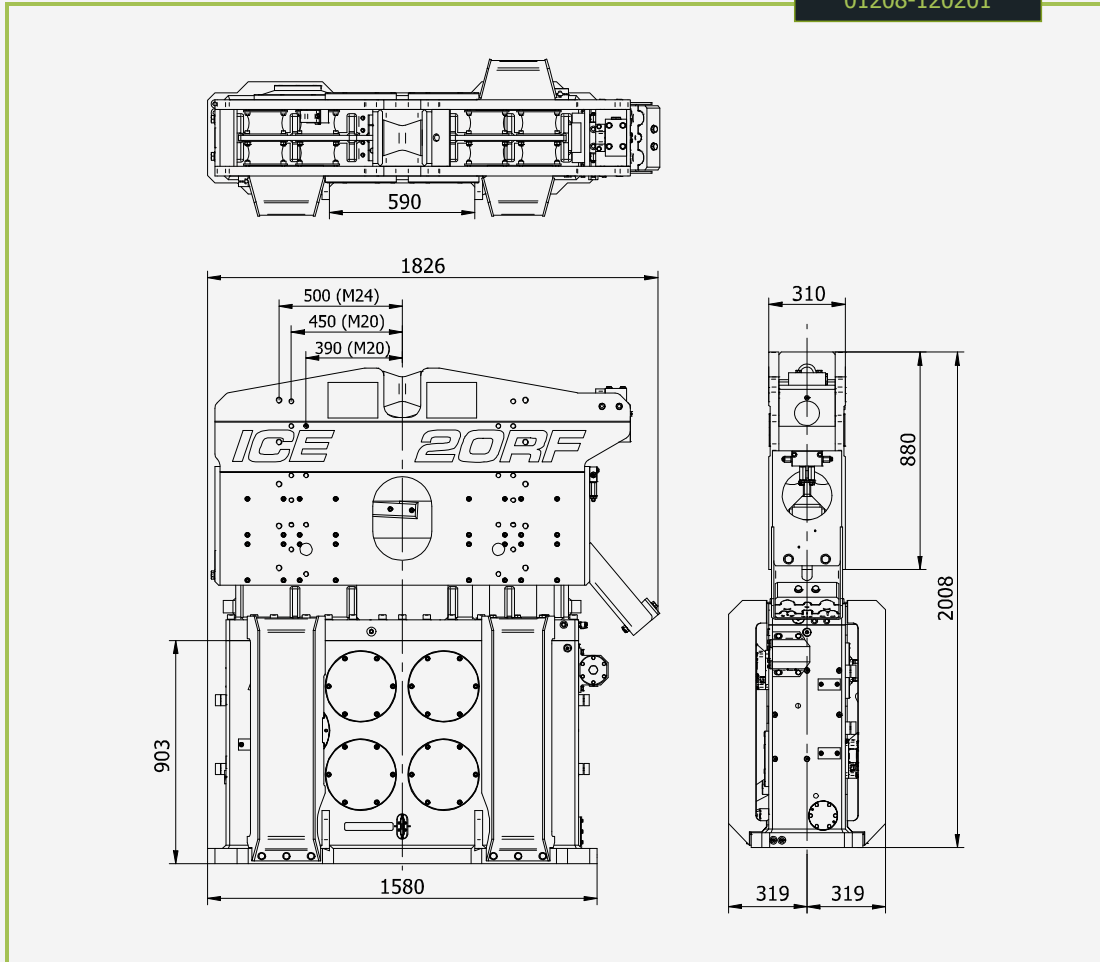

SPECIFICATIONS		20RF			
Eccentric moment	0-19.0	kgm		CLAMPS:	
Max. centrifugal force	0-1100	kN		Universal	130TU
Max. frequency	2300	rpm		Weight	610 kg
Max. amplitude excl. 130 TU	14.6	mm			
Max. amplitude incl. 130 TU	10.3	mm			
Max. static line-pull	240	kN		POWERPACK:	
Max. hydraulic power	292/398	kW/HP		Model	500RF
Max. operating pressure	350	bar			
Max. oil flow	498	l/min		FORCED LUBRICATION:	
Dyn. weight excl. 130 TU	2600	kg		Max. oil flow	22 l/min
Dyn. weight incl. 130 TU	3700	kg			
Total weight incl. 130 TU	4130	kg			
Transport weight	4925	kg			

ICE 600 RF Hydraulic Power Pack

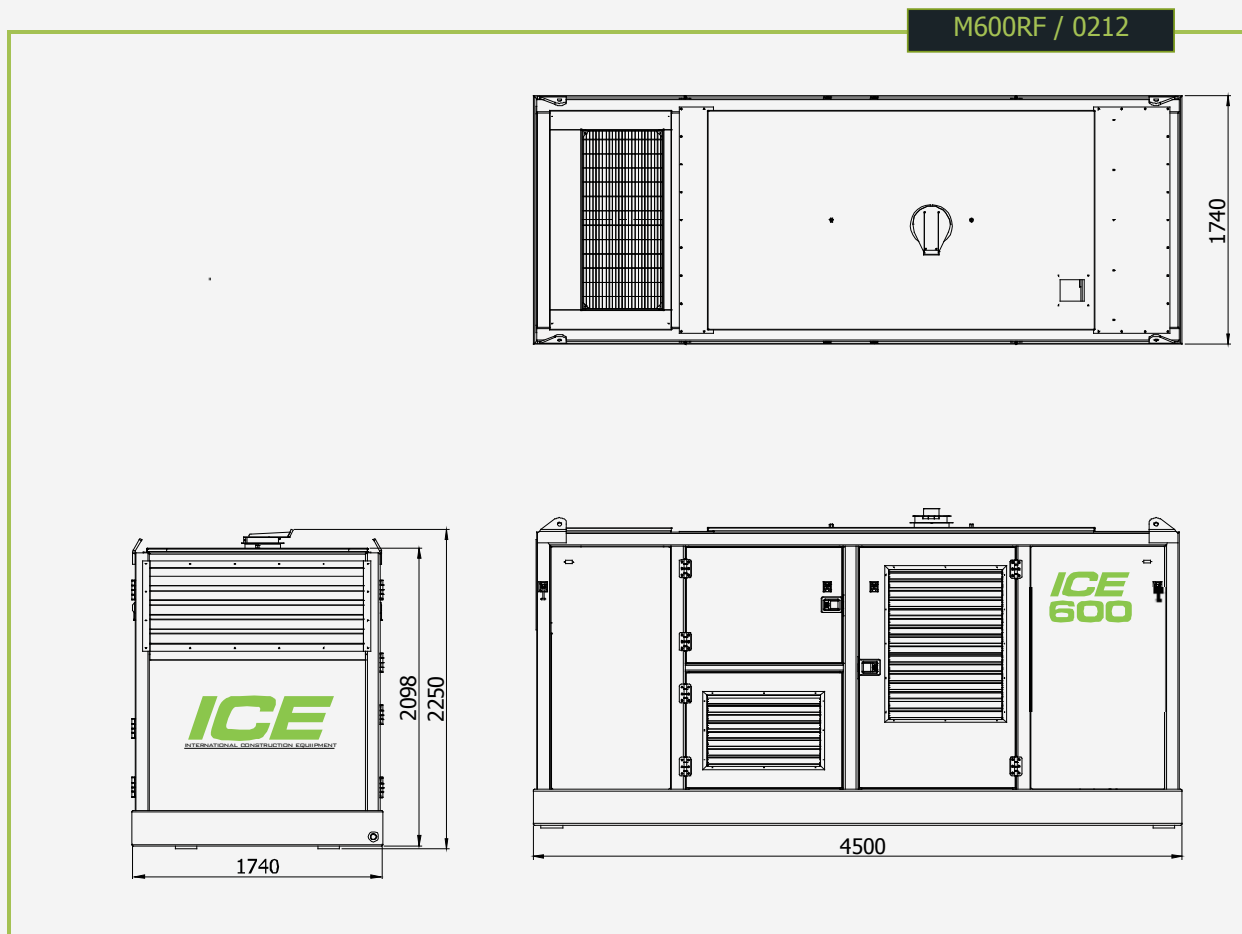


SPECIFICATIONS

600RF

Diesel engine	Caterpillar C15
Max. power	403/548 kW/HP (DIN)
Max. Frequency	2100 rpm
Max. working pressure	350 bar
Max. oil flow	670 L/min
Diesel oil	650 L
Hydraulic oil	1200 L
Weight (±)	7600 kg

ICE 130 TU *Universal Clamp*

M130TU0011 / 1009

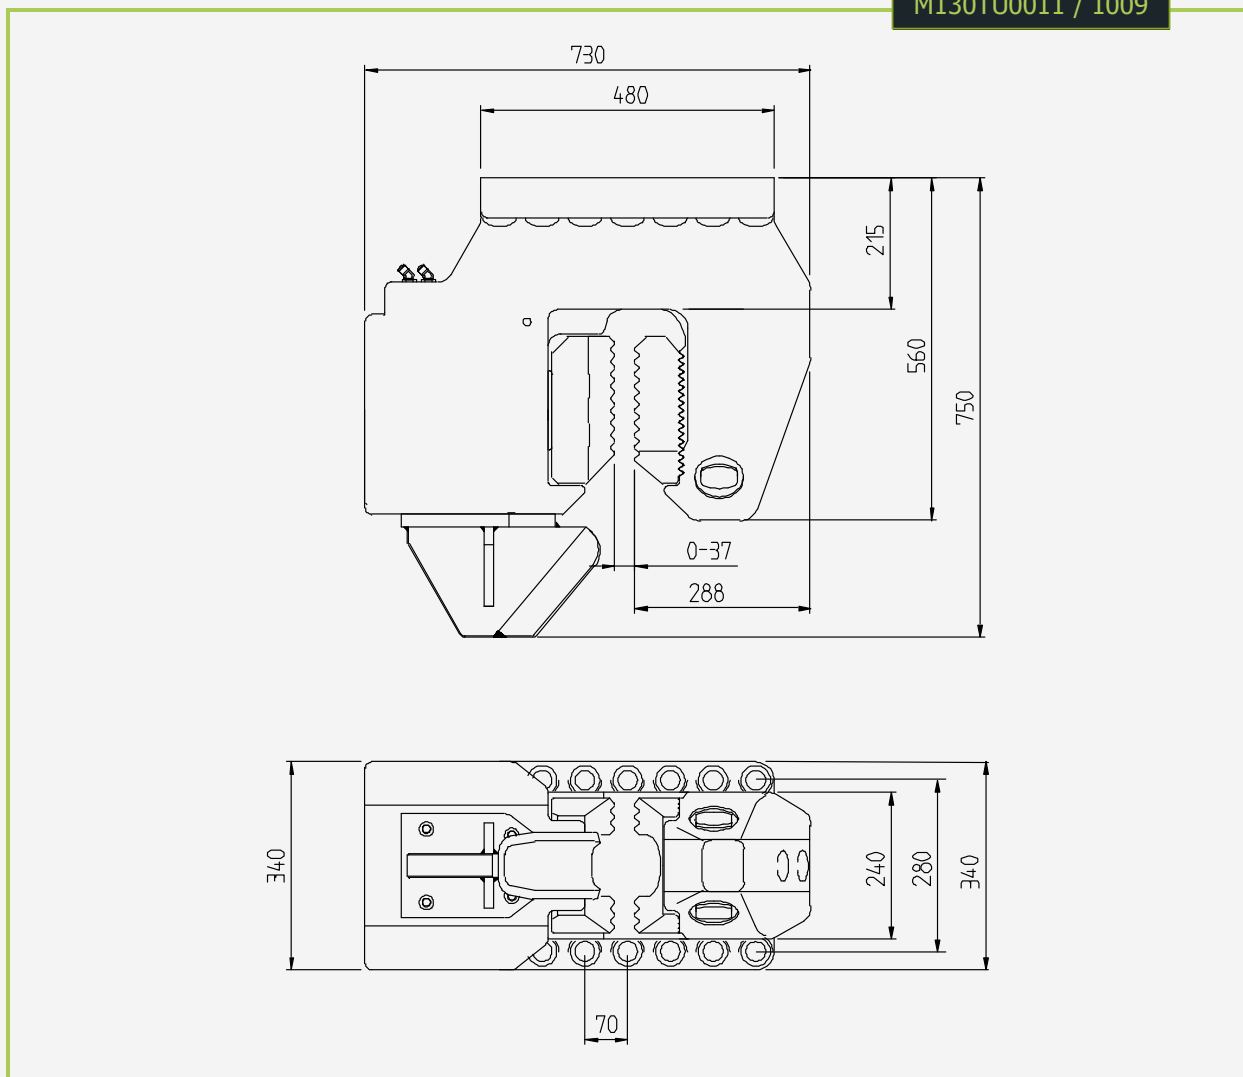

SPECIFICATIONS:

Universal clamp		
Clamping force	1300	kN
Max. operating pressure	320	bar
Weight	610	kg

TECHNISCHE DATEN:

Universalzange		
Klemmkraft		
Max. Betriebsdruck		
Gewicht		

SPECIFICATIONS:

Pince universel		
Force de serrage		
Pression de travail max.		
Poids		

SPECIFICATIES:

Universeelklem		
Klemkracht		
Max. werkdruk		
Gewicht		